




# CC41

---



***CENTRAL***  
***CONTROL***

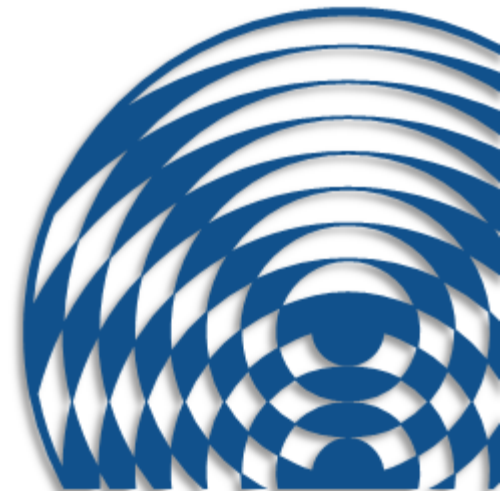


# First steps

Short instruction




# First steps

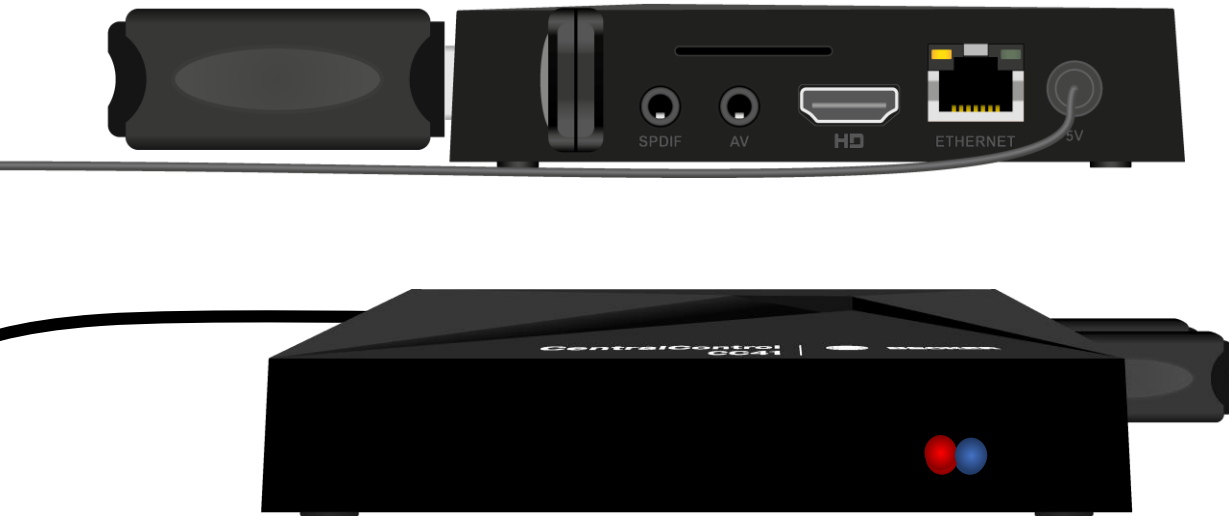

- Plug in the mains cable and wait approx. 5 s
- The red LED on the front flashes red and blue alternately several times (change of network configuration)
- After that, the blue LED lights up continuously and the red LED flashes cyclically, indicating that the access point is activated - the unit is now in setup mode

# First steps

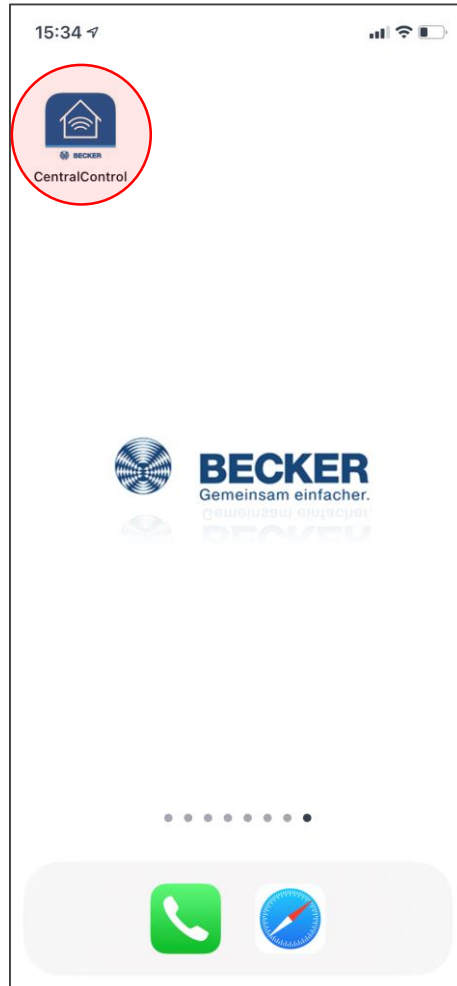

- Install the Becker CentralControl app (iOS/Android) using the following QR code



- (also included in the operating instructions), or enter "Becker CentralControl" in the search field of the AppStore or PlayStore.
- Start the app




# First steps




- Select the CentralControl CC41

# First steps

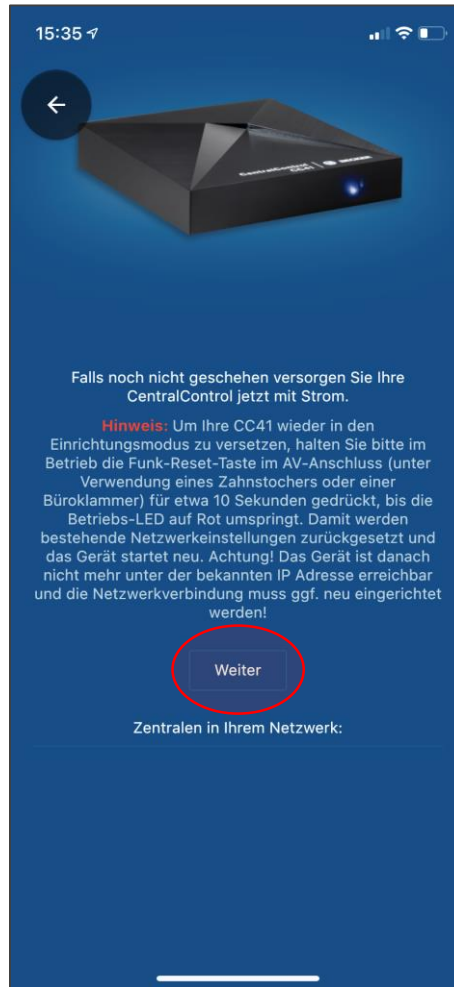


- You will be advised that the CC41 must be in set-up mode
- If the CentralControl is already in your network, for example when connected with a cable, it will appear under "CentralControls in your network".
- Press „Continue“

# First steps

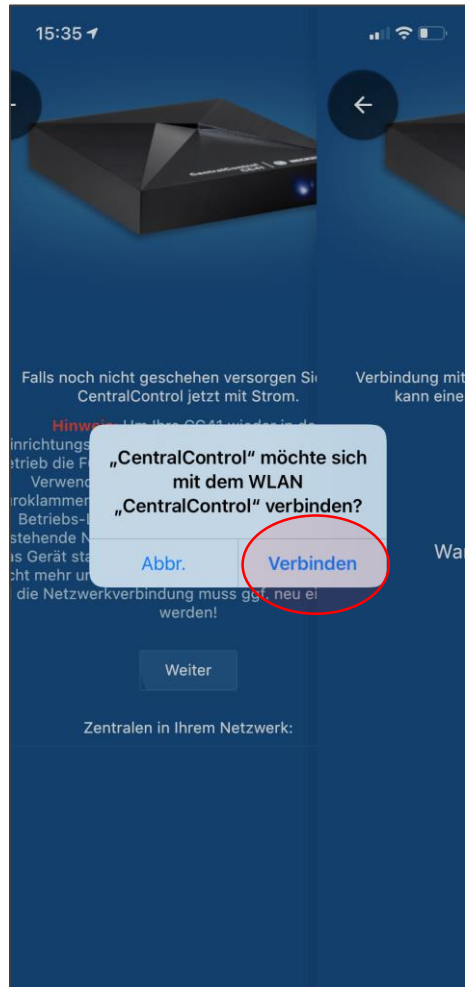

- Allow your mobile phone to connect to the Access Point of the CC41 and press "Connect".
- If you are asked for location permissions, please allow them - the app needs them to find your CentralControl in the network later.

# First steps

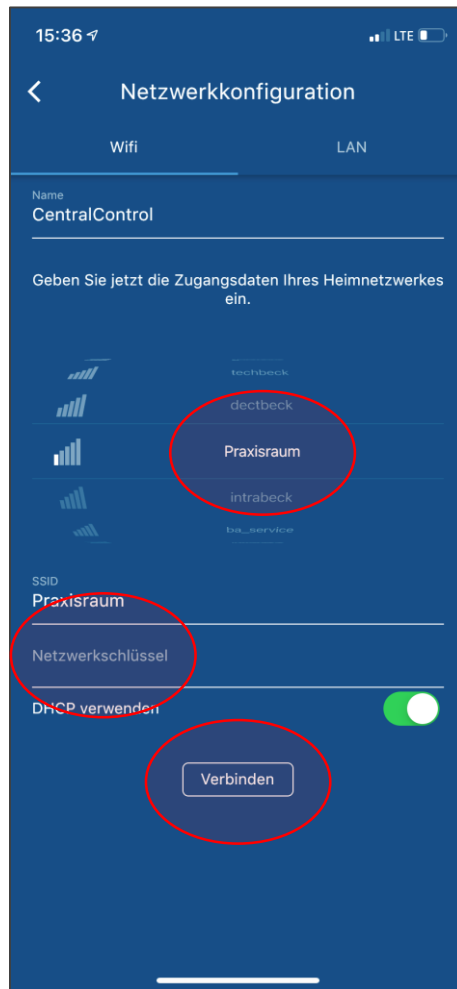


- Select your WLAN from the list of networks found  
Tragen Sie den Netzwerkschlüssel ein
- Tap on „Connect“
- Attention! Please do not use guest networks to operate your CentralControl. These usually prohibit communication between your smartphone and other network participants such as the CentralControl.

# First steps



- The CC41 now connects to your home network
- The LED in the CC41 lights up blue to indicate that the connection was successful.
- Make sure that your smartphone and the CentralControl are then in the same network.


# First steps

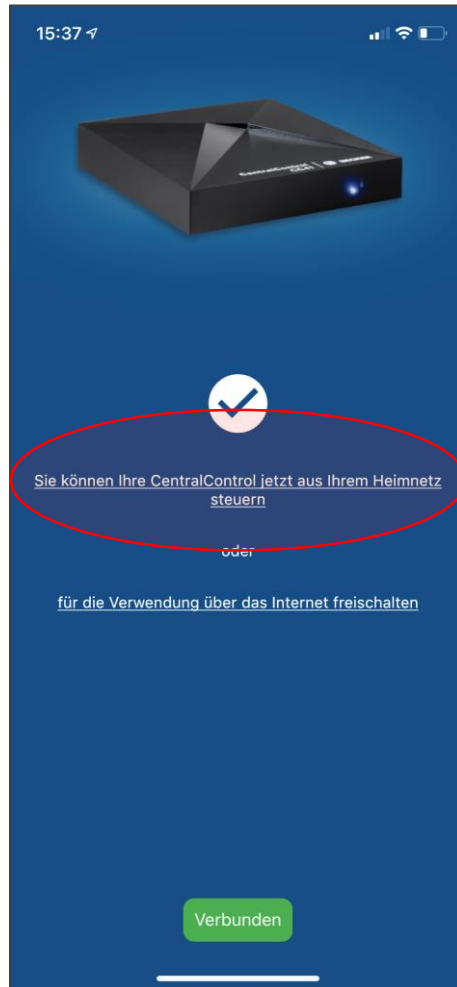

- If the connection was successful, your CentralControl will now be found automatically
- Now tap on the upper menu item or alternatively set up remote access directly via the Becker Gateway server
- Done! You can now control your CentralControl with your smartphone




# Reset / Activate Access Point


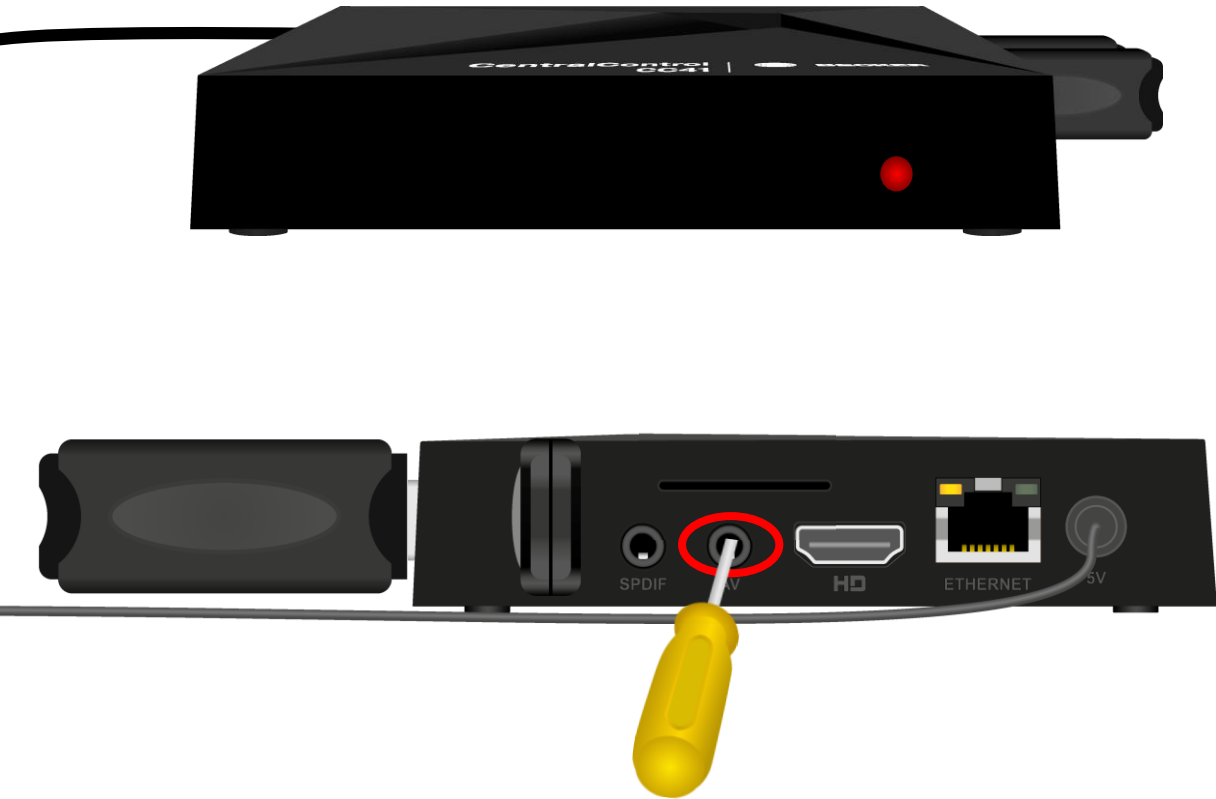


- If the connection fails and the LED on the front of your CentralControl lights permanently red, an error has probably occurred when entering the network data.
- In that case put the CentralControl back into teach-in mode
- To do this, press the reset button (in the centre of the bottom of the AV socket) until the LED confirms the process by flashing red and blue.

# Rooms, receivers and timers

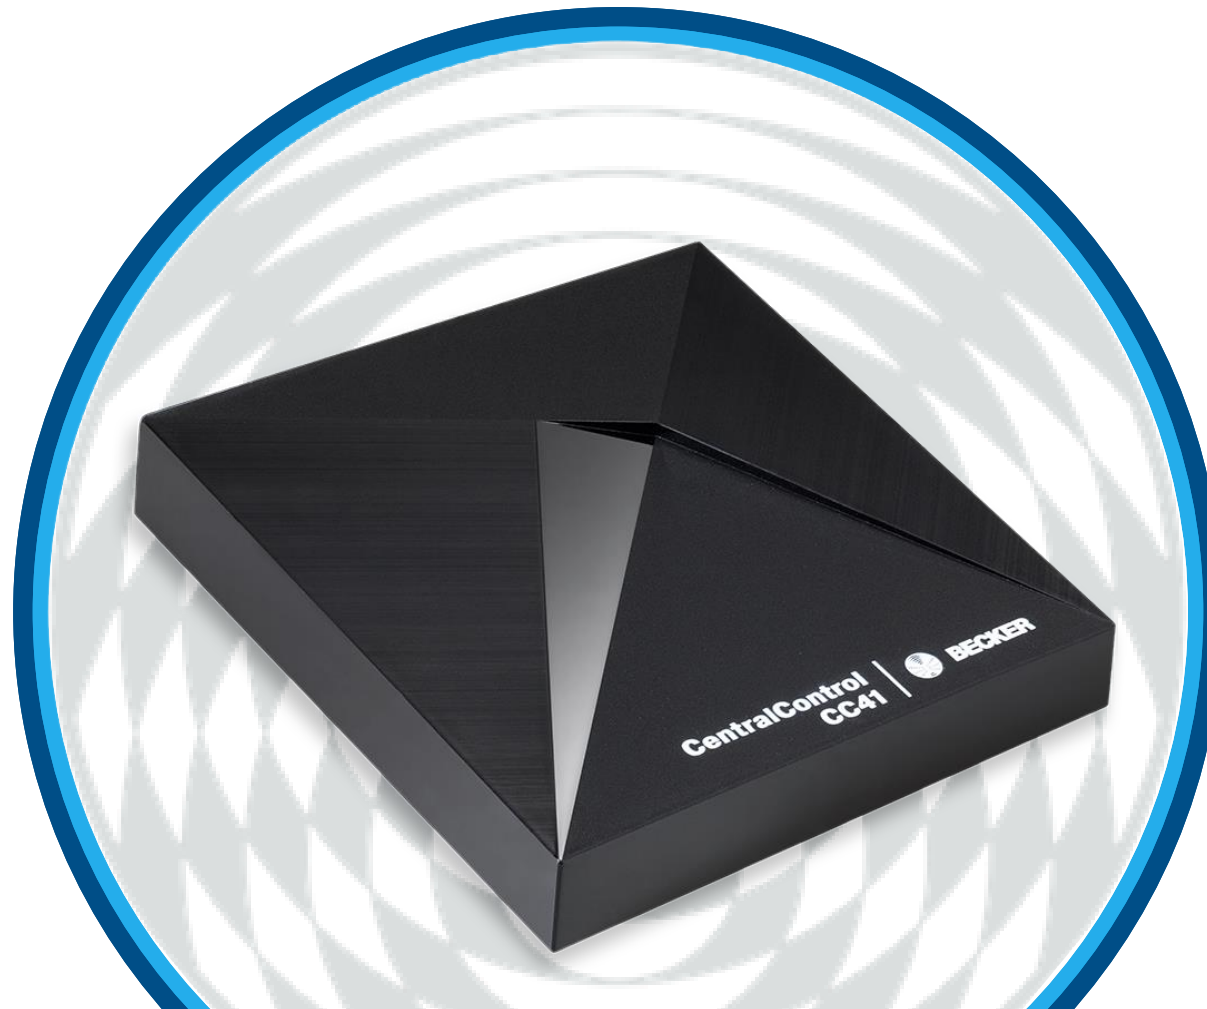


# Add rooms

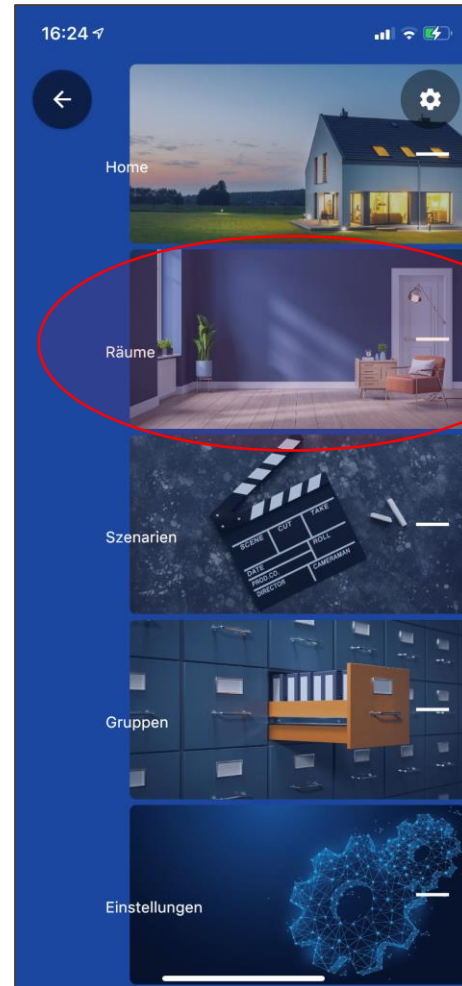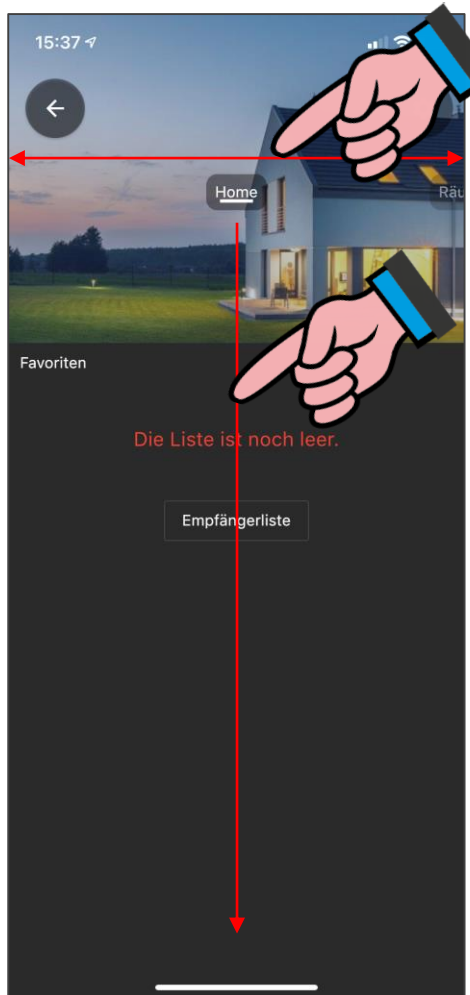


- Swipe left and right to navigate through the app's menu items
- Alternatively, the current menu item can also be dragged downwards to show a quick navigation
- Select the item "Rooms"

# Add rooms

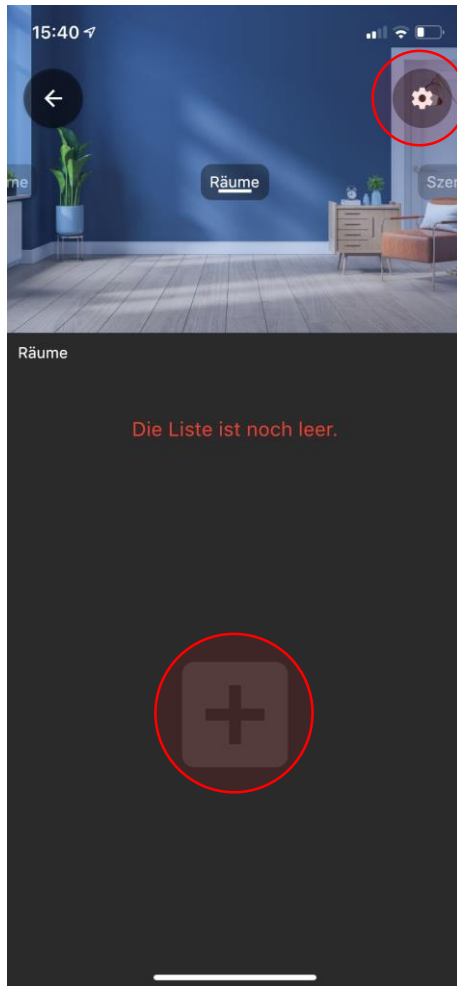


- Tap the "+" symbol to create a new room
- By tapping the cogwheel symbol in the upper right corner, rooms can be deleted or created later.

# Add rooms

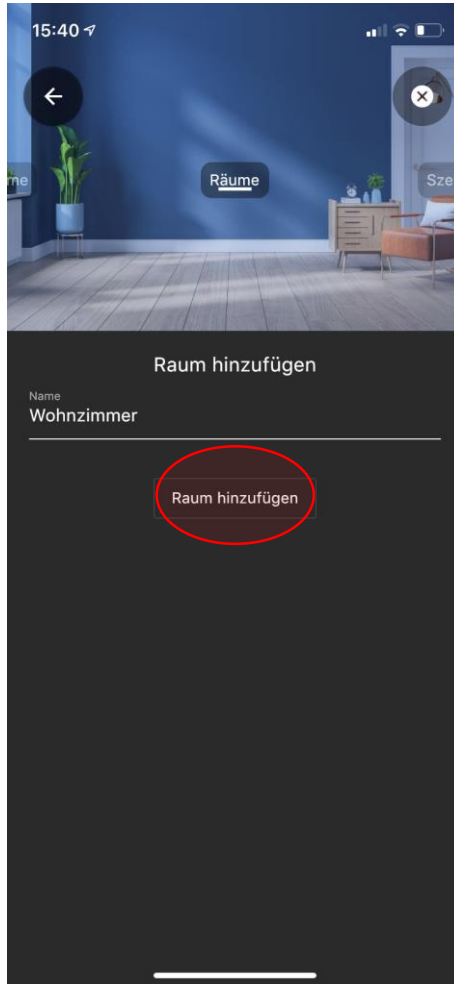

- Enter the name of the new room and tap on "Add room".


# Add rooms

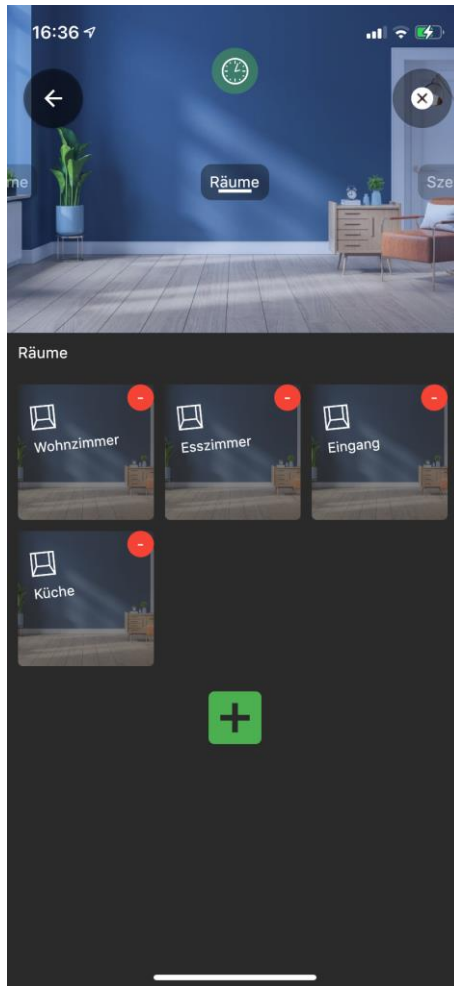

- With this you can create all the rooms for your house
- By moving the icons, you can change the arrangement of your rooms as you desire
- Open the room you want to place the receivers in (tubular drives, external radio receivers, etc.) by tapping on it.




# Add receivers

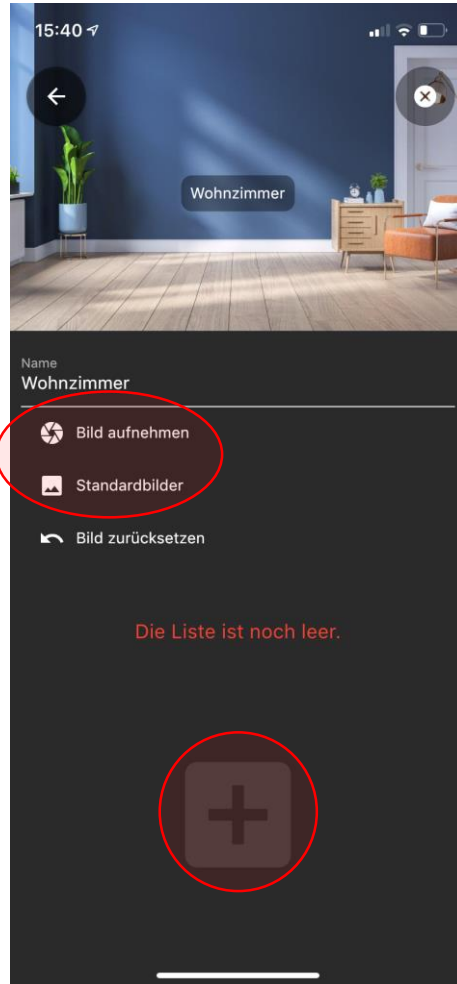

- For better recognition, you can optionally assign an image to the room (your own photo or standard image).
- To teach in a receiver, tap on "+".

# Add receivers

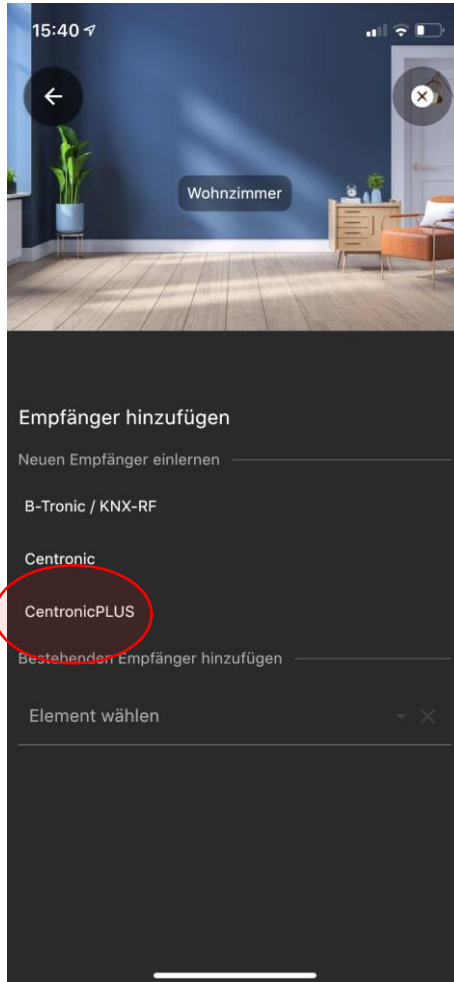

- Select the corresponding radio system and follow the instructions in the app and the operating instructions of the device to be taught in


## Für das Herstellen der Lernbereitschaft an den Empfängern beachten Sie bitte:

**Centronic:** Via master handheld transmitter

**B-Tronic:** Via a taught-in transmitter or by switching on the power supply


**CentronicPLUS:** By switching on the power supply of a unit in the installation

# Add receivers

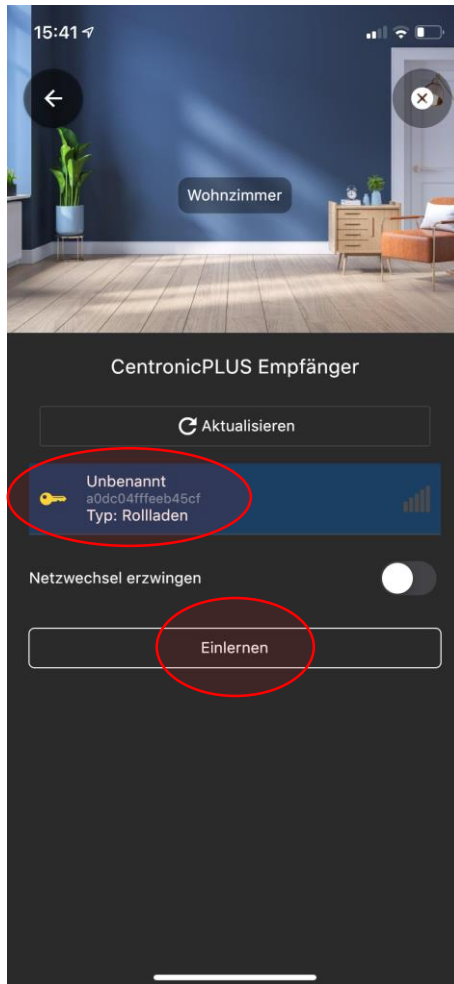


- In our example, we use the CentronicPLUS radio system. Here, after a short time, all the devices that have previously been put into teach-in readiness are automatically listed
- Select the desired receiver (the selected CentronicPLUS receiver clicks or waves for identification)
- After the selection, tap on "Teach in".

# Add receivers

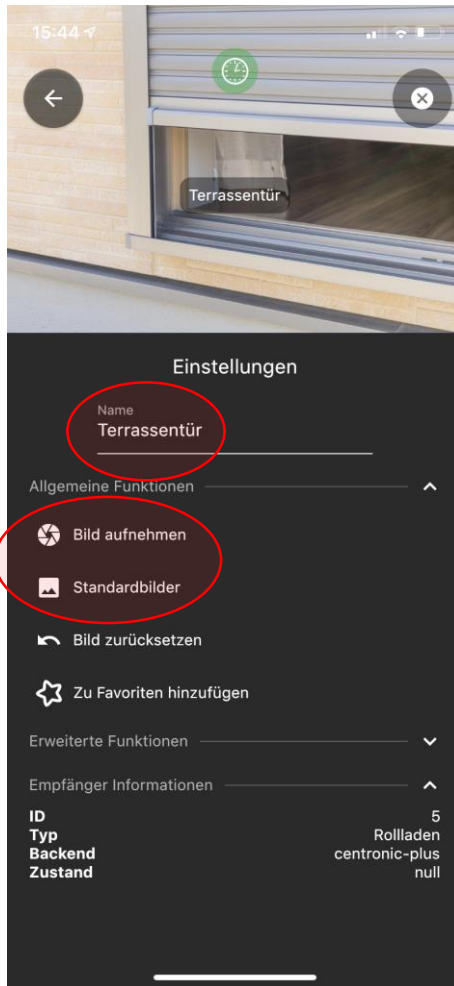


- Name the receiver according to your wishes
- For better recognition, you can optionally assign a picture to the recipient (your own photo or standard picture).

# Add receivers

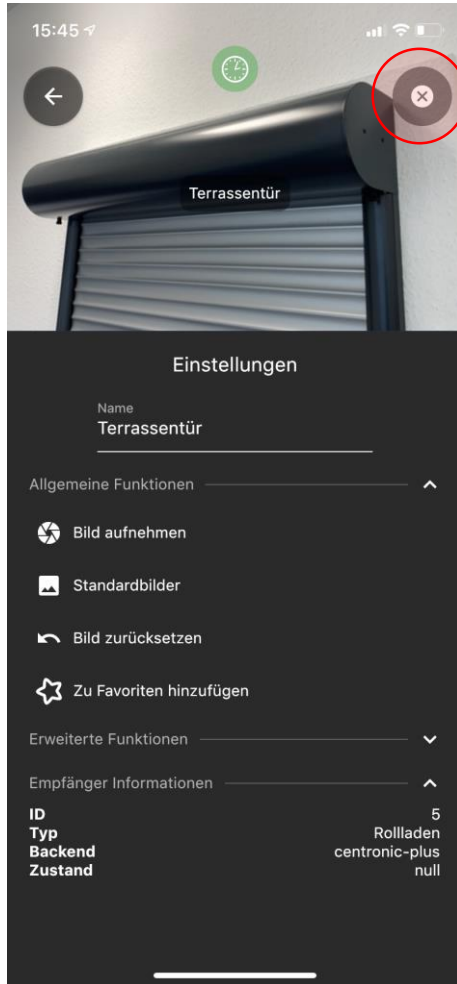

- In our example, we have assigned our own photo for our CentronicPLUS device and chosen the name accordingly
- Note: All stored images are only stored locally on your smartphone. If you want to use another device, the standard images will be displayed there again.
- Tap the "X" in the upper right margin to exit the settings menu.
- Done!


# Operation

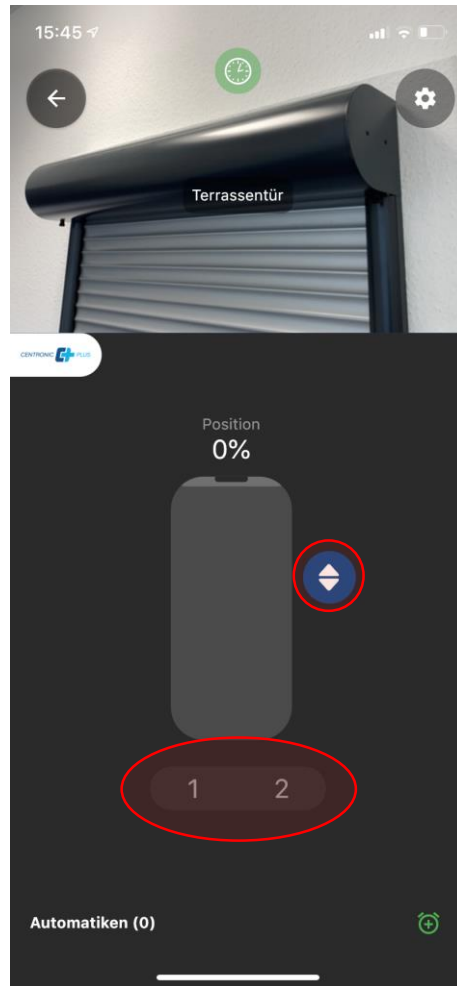


- The slider in the centre of the image can be used to move directly to a desired position - optionally, it is possible to switch to the up-stop-down button operation
- The buttons 1 and 2 can also be used to move to predefined intermediate positions. These must be programmed beforehand with the help of a hand-held transmitter. For details on how to do this, please refer to the operating instructions of the respective unit.



# Timers

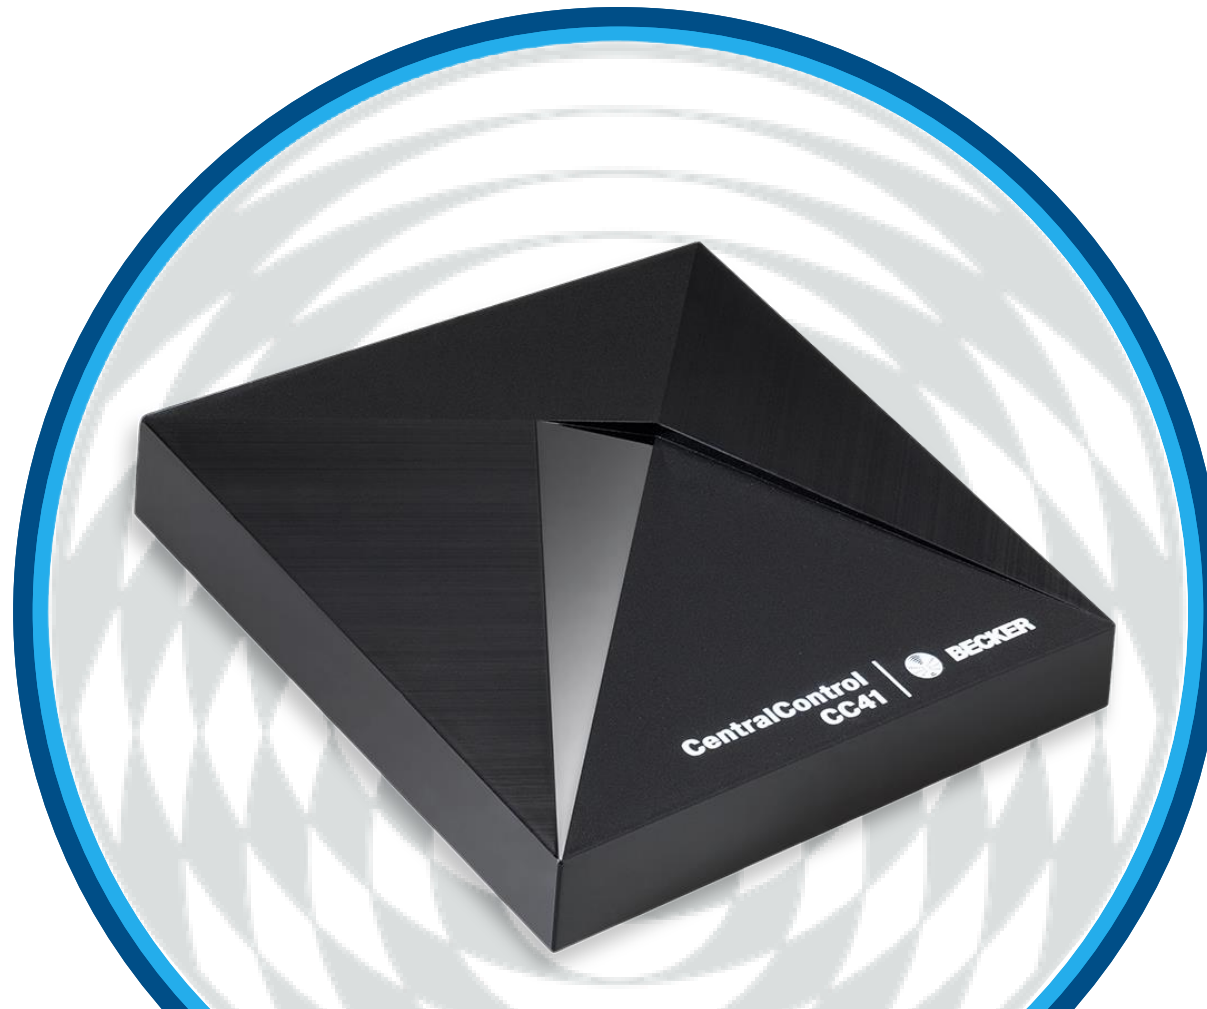


# Timers

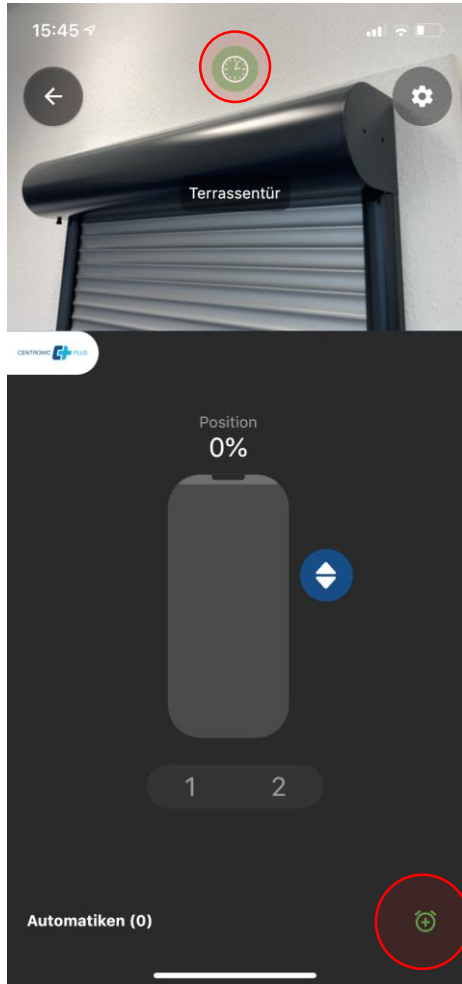


- The alarm clock icon at the bottom of the screen can be used to assign timers to each receiver
- You can switch the timer function on or off for each unit with the green symbol above the receiver name.
- This function is of course also available in groups and scenarios

# Timers

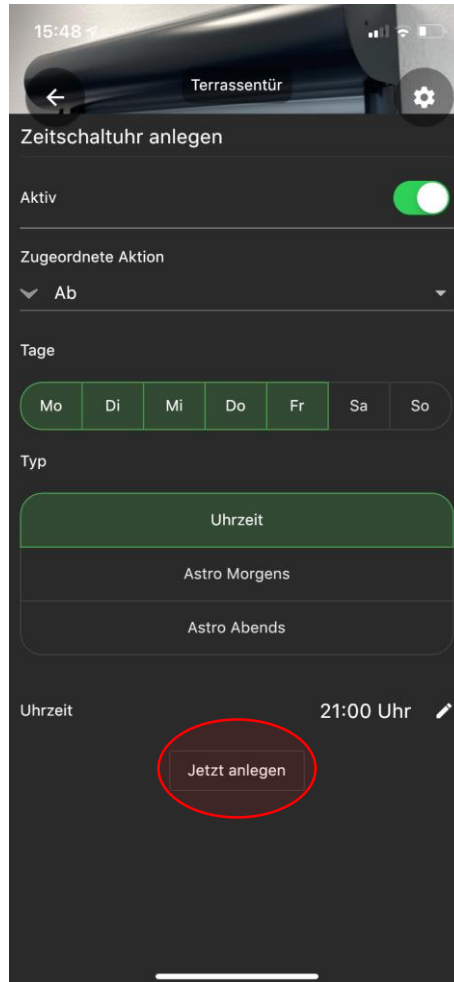

- Several timers can be created for one receiver
- In addition to freely selectable switching times, astrofunctions for mornings and evenings with individual astroshift and blocking times are also available
- By pressing "Create now" the timer is saved

# Timers

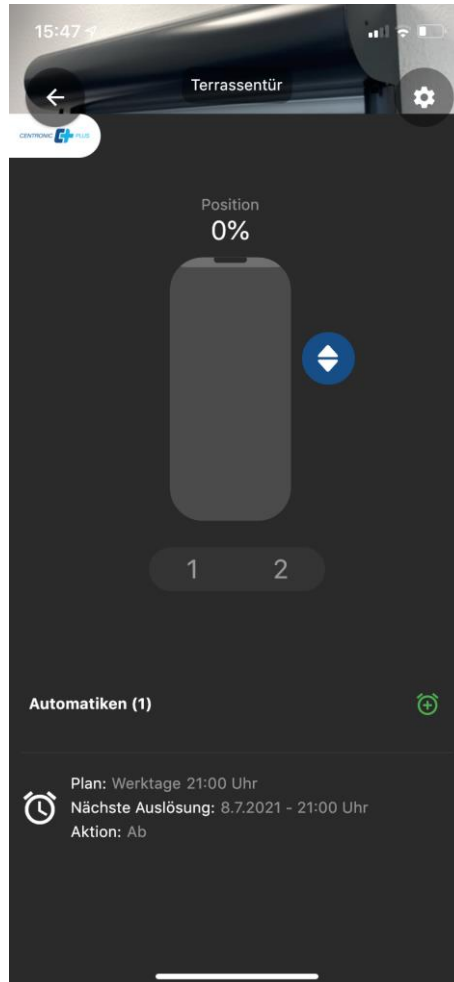


- In the lower area of the screen you can now see the timers that have been created
- Here, for example, you can see when the respective timer will be triggered the next time
- Done!

# Scenarios





# Scenarios

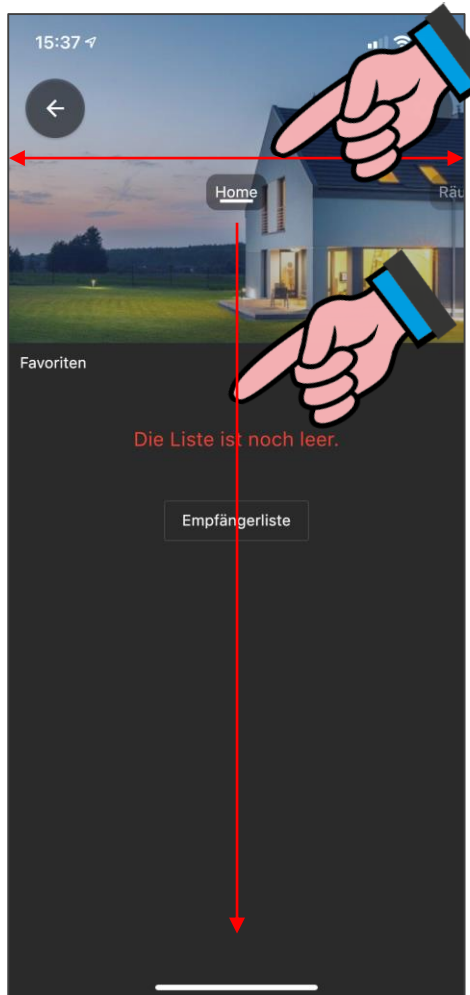

- Select the item "Scenarios" by swiping or from the quick navigation




# Scenarios

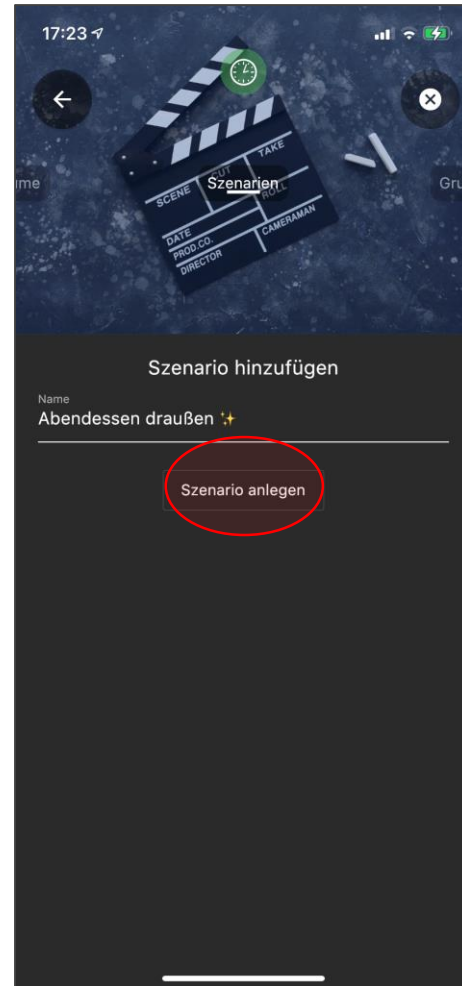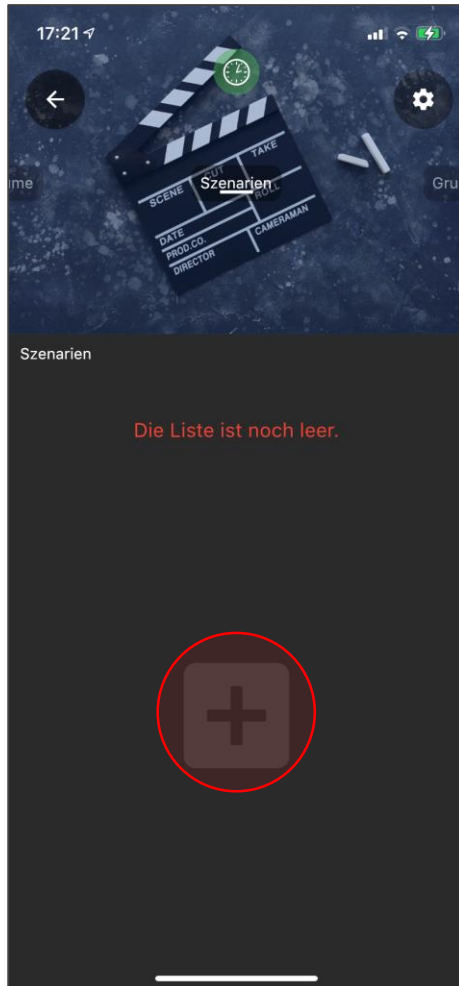


- After tapping the "+" symbol, you can enter a name for the scenario to be created
- Tap on „create scenario“

# Scenarios

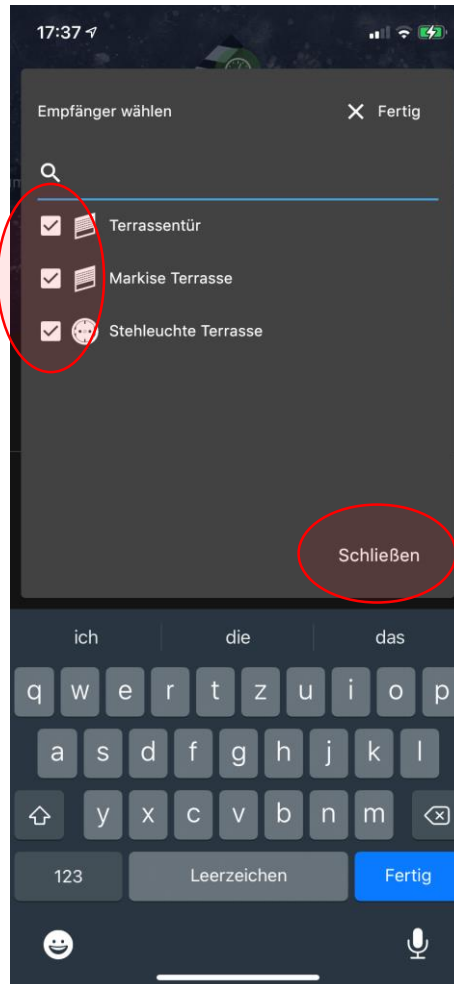


- Select the receivers you want to control in your scenario
- Tap on „Close“

# Scenarios

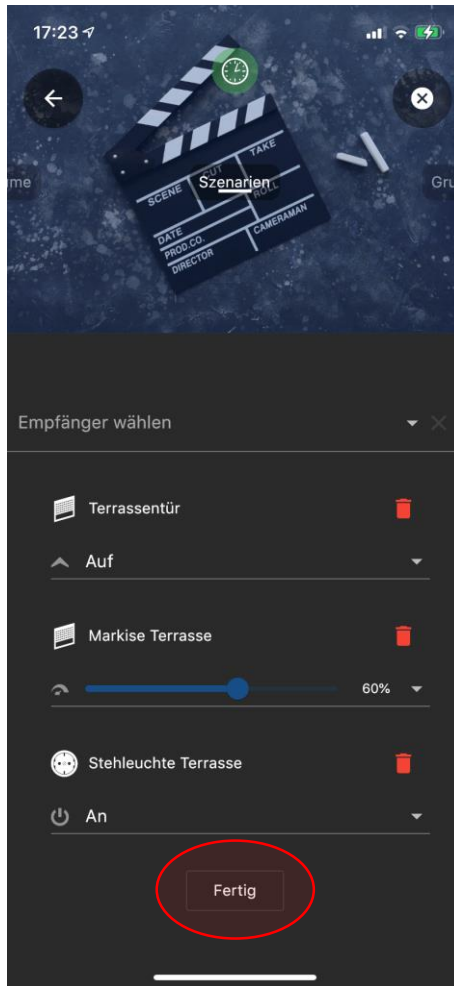

- The "Settings" page opens
- Use the drop-down menu to determine the behaviour of the receivers when the scenario is triggered
- With B-Tronic or CentronicPLUS receivers, additional %-positions can be approached.
- Leave the settings by tapping „Done“

# Scenarios


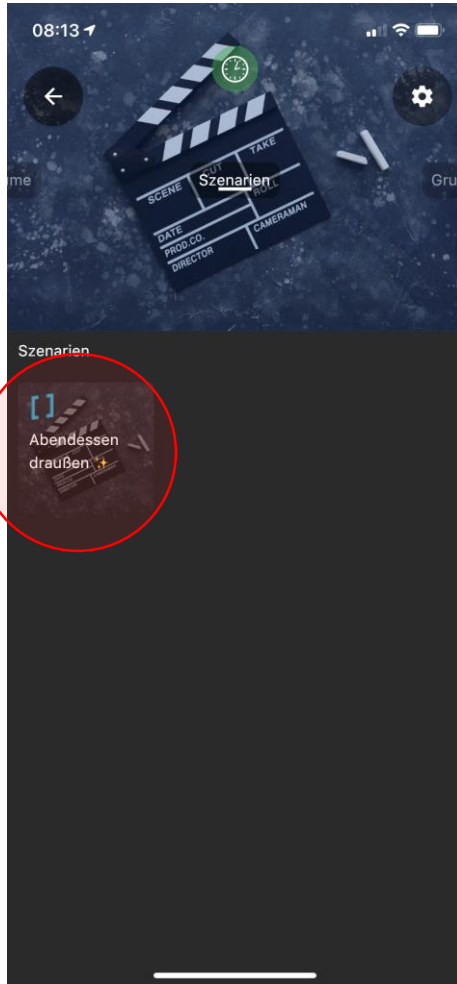


- To activate your scenarios, simply tap them in the overview
- To edit, press the cogwheel symbol at the top right and then press the desired scenario
- Done!

# Groups




# Groups

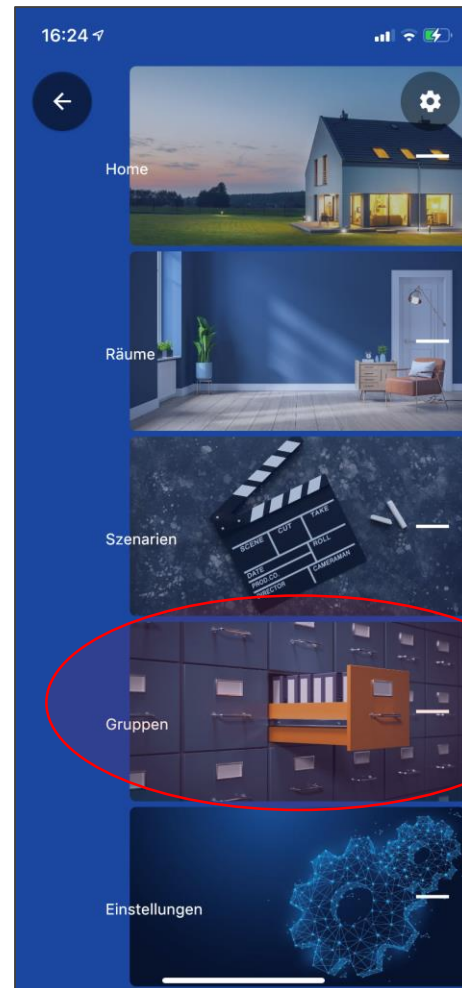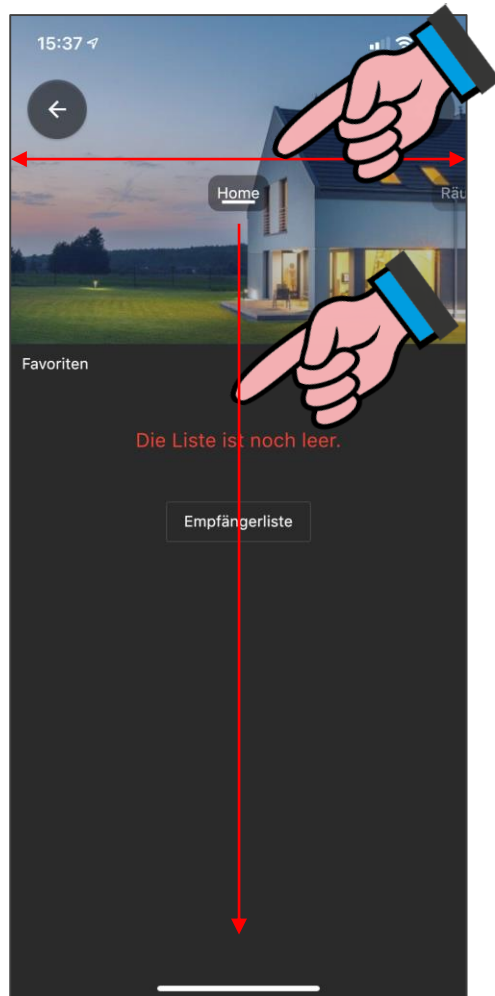



- Select the item "Groups" by swiping or from the quick navigation

# Groups

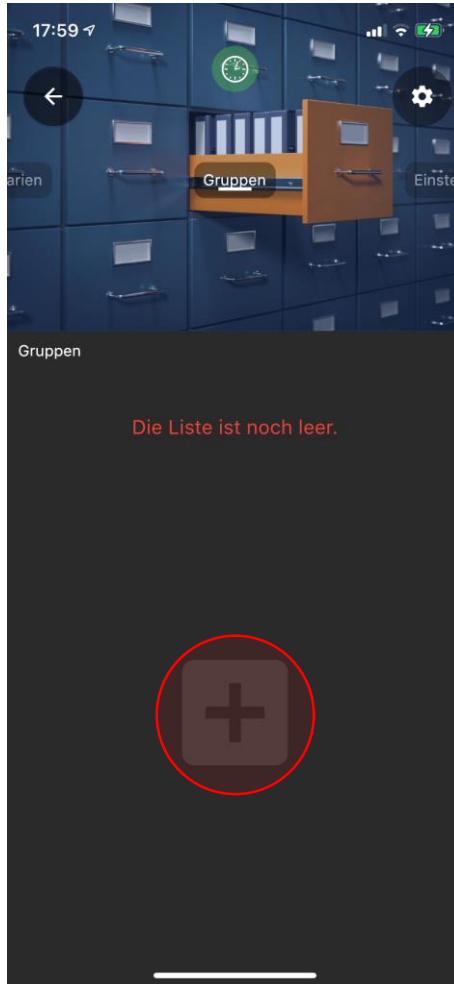

- Tap the "+" symbol to create a new group
- Groups can be deleted or created at any time by tapping the cogwheel symbol in the top right corner



# Groups

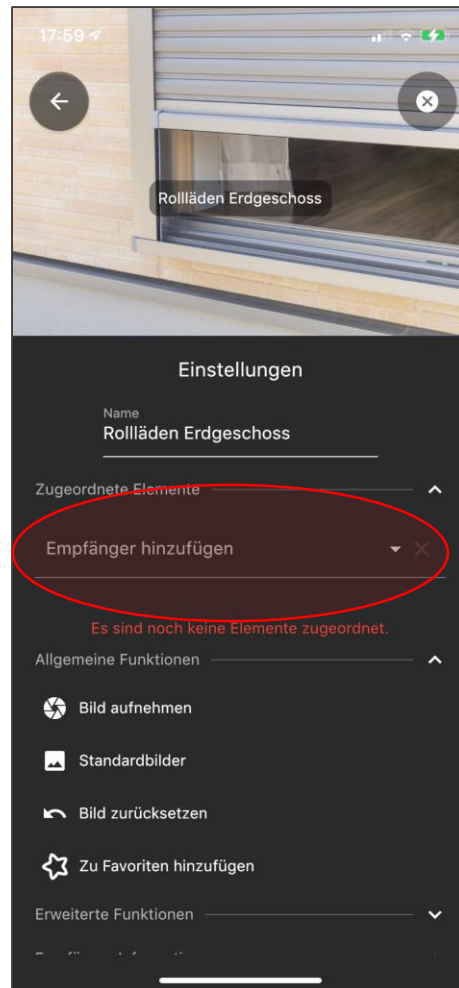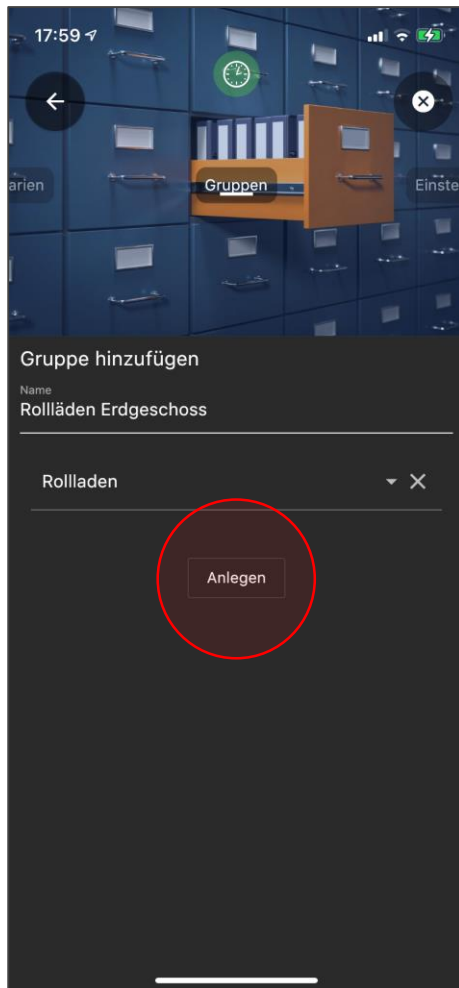

- Enter the name of the group and select the appropriate receiver type from the drop-down menu
- After that, create the group by tapping on "Create".
- In the settings screen, tap on "Add recipient" to add devices to the group




# Groups

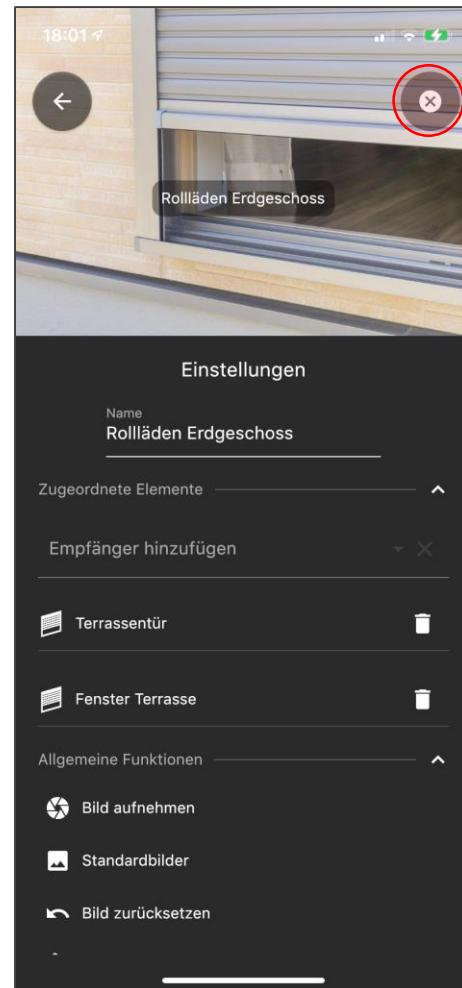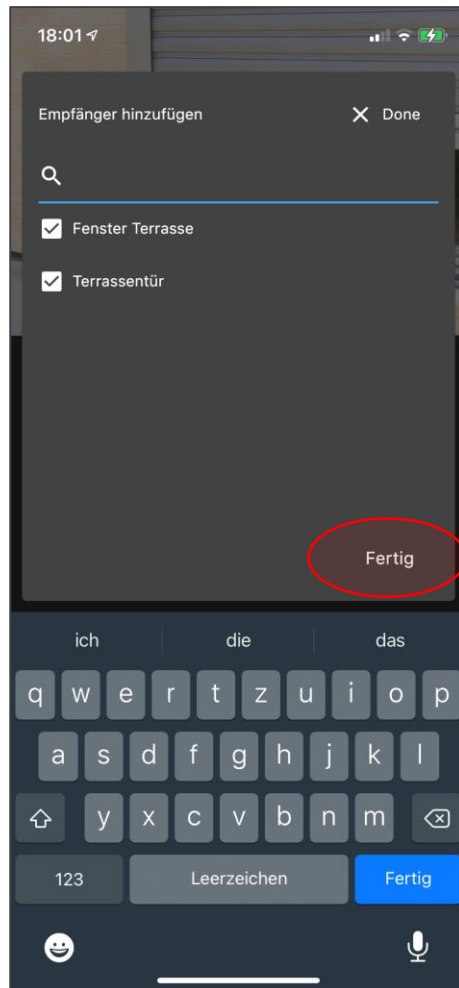


- All available devices of the selected type are displayed and can be selected
- Tap on "Done" to apply the selection
- Return to operating mode by tapping on the „X“-symbol

# Favourites

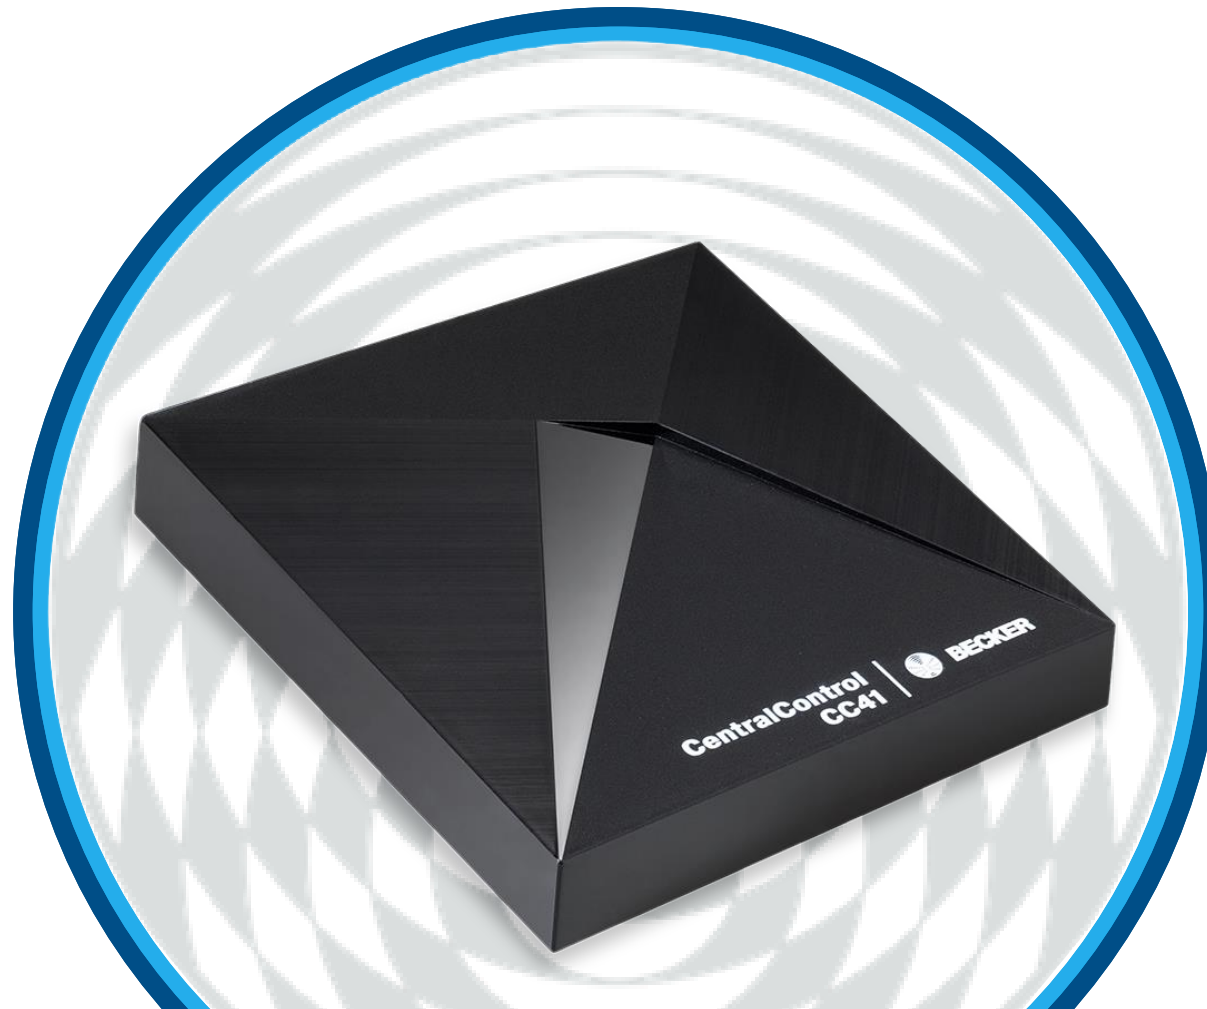

# Favourites

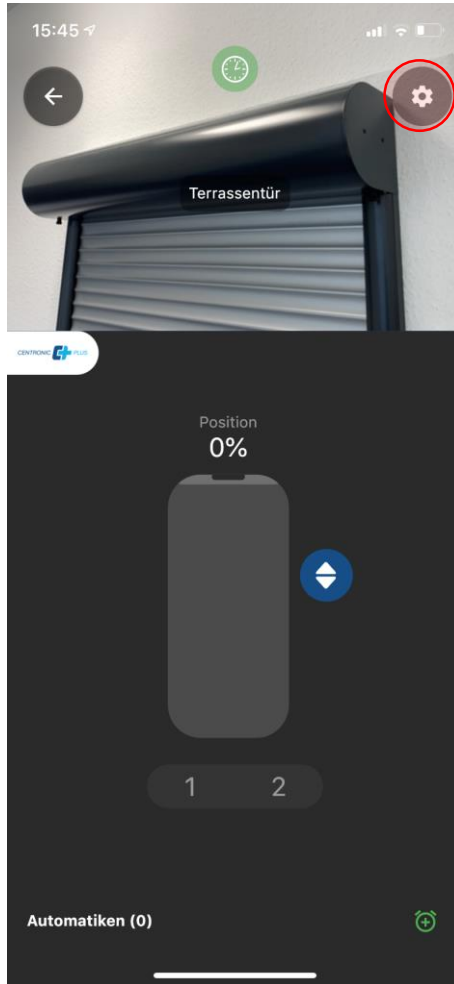


- You can save receivers, rooms, scenarios or groups as favourites on the Home page of your CentralControl App.
- To do this, press the cogwheel symbol in the control panel.

# Favourites




- Now select the option "Add to favourites" from the menu.

# Favourites

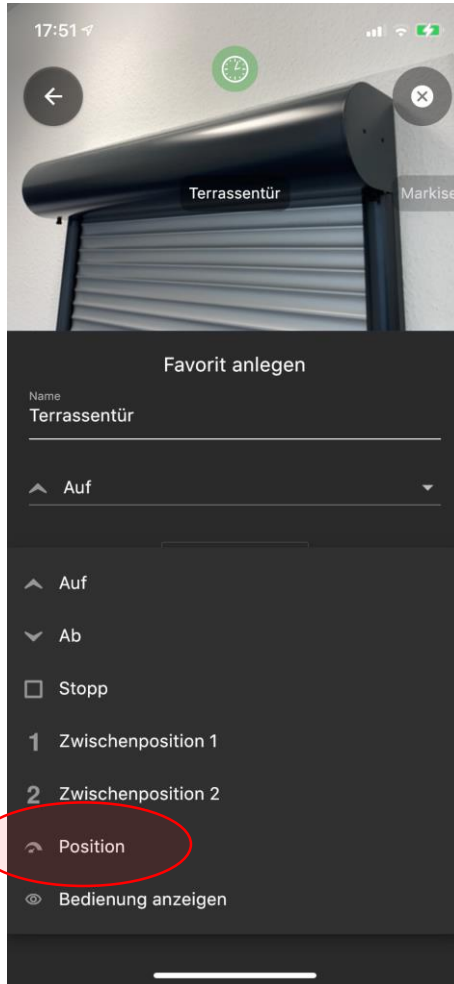


- From the drop-down menu, select the desired action when tapping on the favourite, e.g. "Position" for the percentage approach for CentronicPLUS devices.

# Favourites

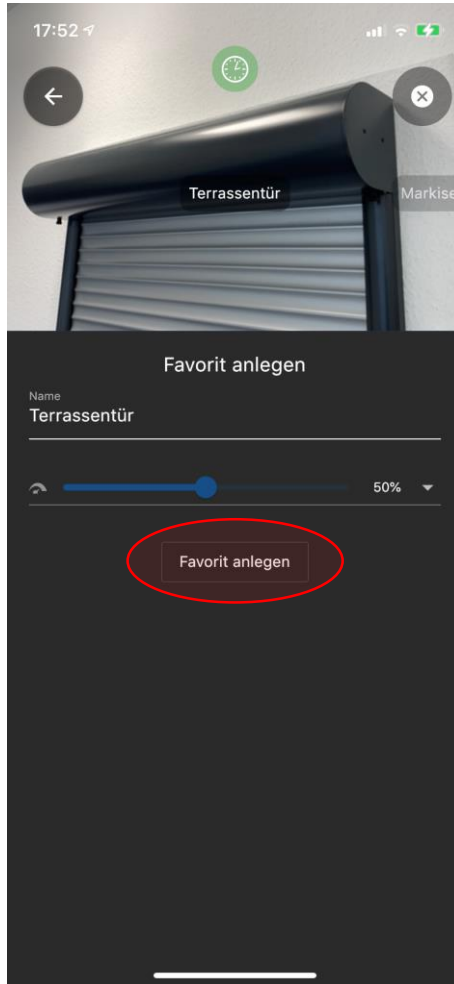


- In our example, we want to move the patio door to an opening height of 50%.
- Then tap on "Create favourite".

# Favourites

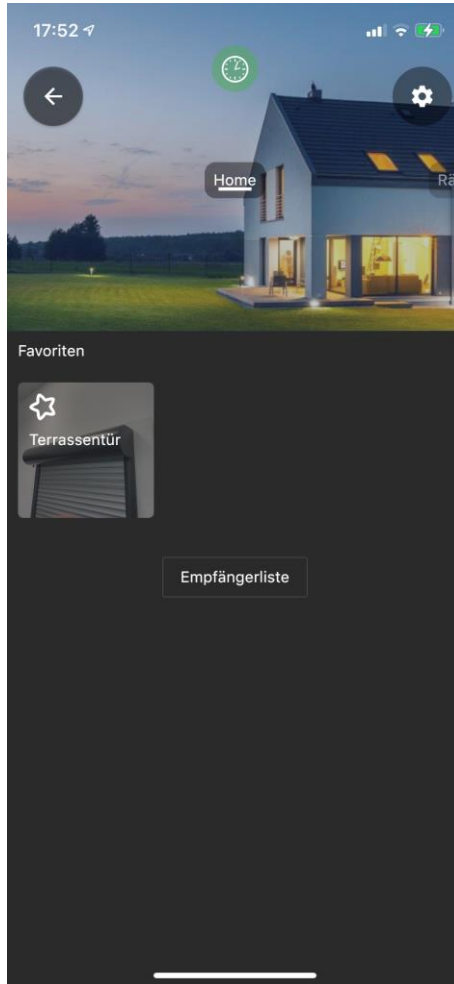


- You are automatically taken to the Home page and the newly created favourite appears
- Simply tap the icon to trigger the stored action
- Done!

# Remote access

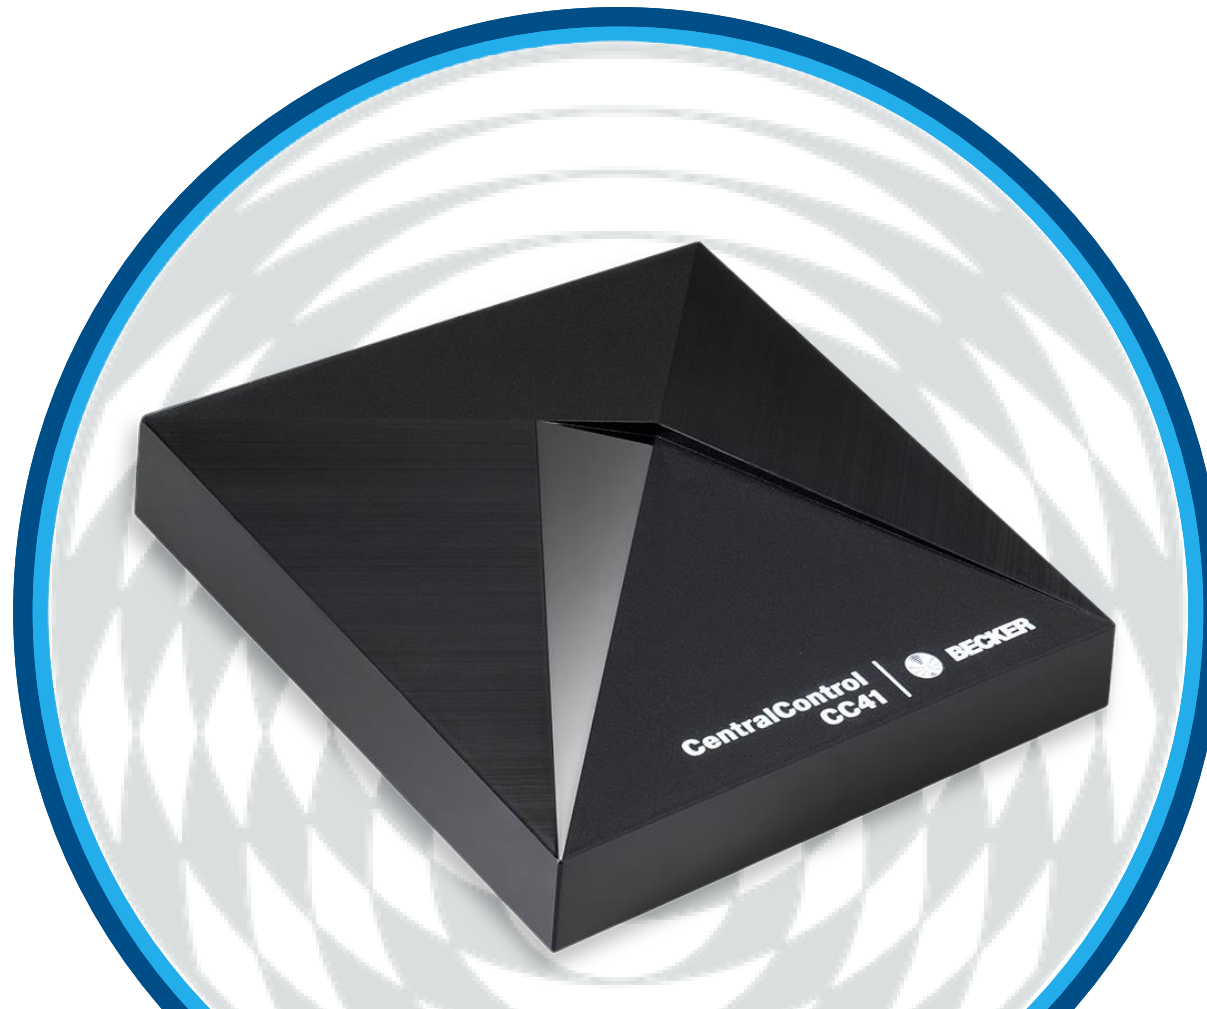





# Remote access

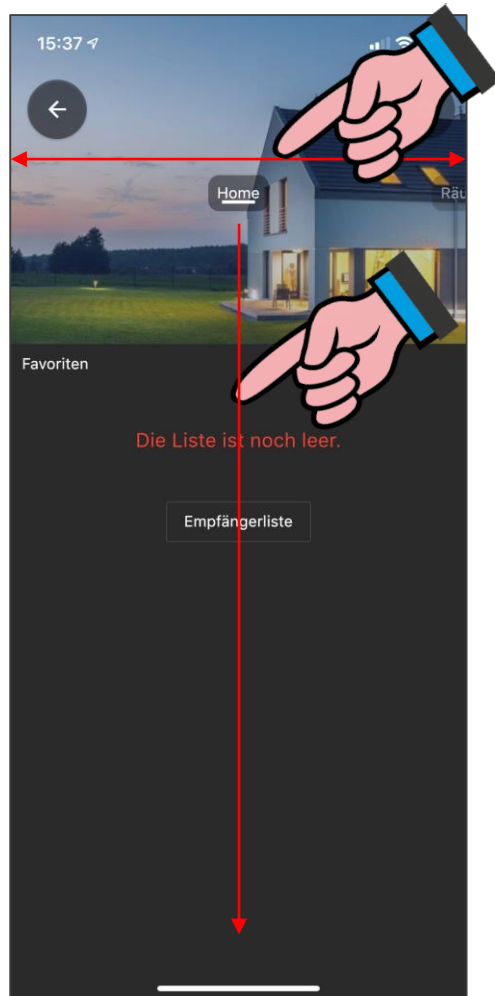


- Select the item "Settings" by swiping or from the quick navigation

# Remote access

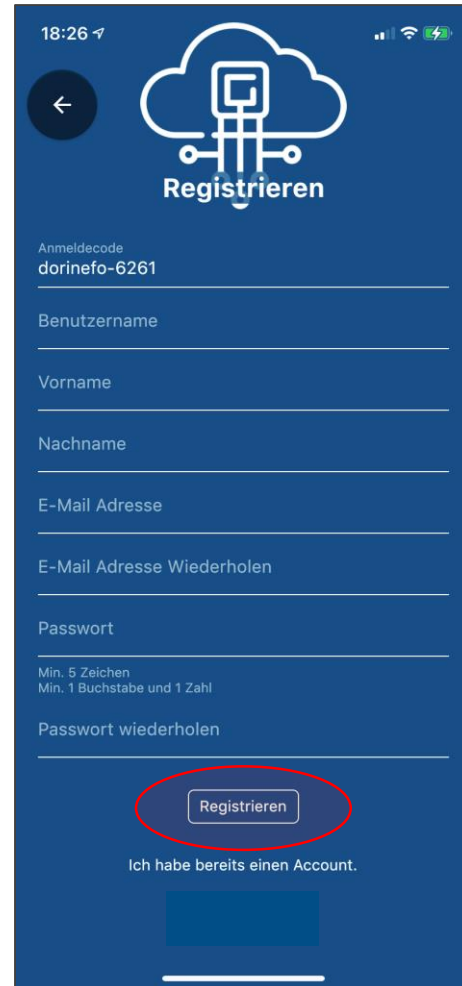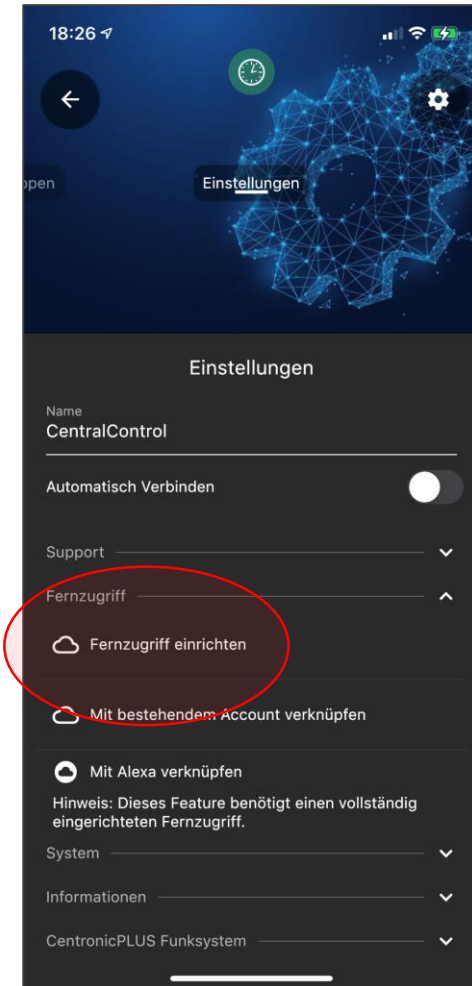

- In the menu item "System", select the option "Set up remote access".
- Now enter the required information in the corresponding fields and confirm the process by clicking "Register"
- Please check your email inbox - you will receive an activation link
- Note: Please also check your SPAM folder if necessary!
- Tap on the link to complete the setup

# Remote access

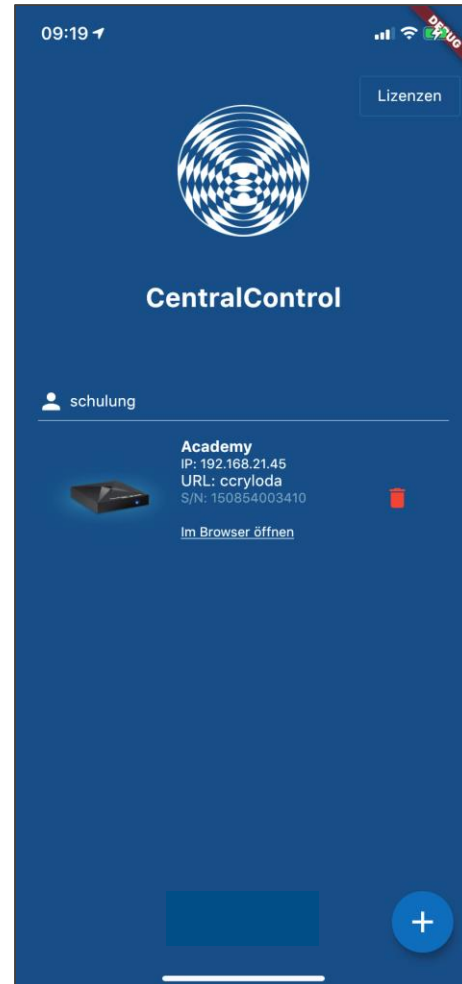

- You will now be prompted to enter the access data you have just created
- After entering the correct data, tap on "Log in".
- After the configuration is complete, the device appears in the list below the assigned user name.
- Fertig!

# Thank you for your interest!



You can also get more information about this product at [www.becker-antriebe.com](http://www.becker-antriebe.com)

Please also visit the YouTube channel of our Becker Academy at <https://www.youtube.com/c/BeckerAcademy> - we would be very happy about a subscription and a "Like"!